


# Wiha crimp tools.



## Crimp tools.

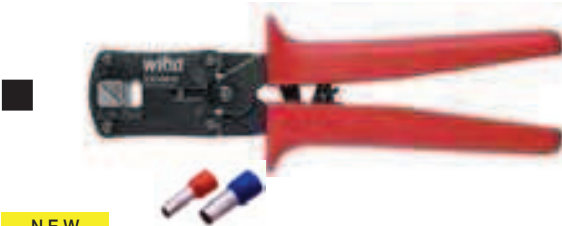

**NEW**

### Z 62 0 000 06 Crimp tools for wire-end sleeves.

**Standards:** Wire-end sleeves with and without isolating collar according to DIN 46228, EN 50027.

**Head shape:** Square crimp, linear pressing.

**Design:** Tool with only one crimp profile. Automatic adjustment of cross-section area. Lateral contact feed. Low hand force required with optimal transmission. Delockable force lock for ensuring complete crimping process; required crimp pressure is factory set. Ergonomically formed soft handle with slip protection for especially comfortable handling.

**Material:** Of high-tensile special steel. Parts subject to extreme loading are specially hardened and tempered.

**Application:** For processing of wire-end sleeves with and without isolating collars, especially suitable for processing of twin sleeves.

Order-No.	mm	mm <sup>2</sup>	AWG	↕	mm	€/pc.
33845 9	196	0.08 - 10	28 - 8	300	1	139.50

## Crimp tools.



**NEW**

### Z 62 0 002 06 Crimping tools for isolated cable eyes and contacts.

**Standards:** Isolated cable eyes and connectors according to DIN.

**Head shape:** Oval crimp, radial pressing. Conducting and isolating crimp are carried out in one work step.

**Design:** Crimp profile:  
**Red profile:** 0.5 - 1.0 mm<sup>2</sup> / AWG 20 - 16  
**Blue profile:** 1.5 - 2.5 mm<sup>2</sup> / AWG 16 - 14  
**Yellow profile:** 4.0 - 6.0 mm<sup>2</sup> / AWG 12 - 10  
 Delockable force lock for ensuring complete crimping process; required crimp pressure is factory set. Ergonomically formed soft handle with slip protection for especially comfortable handling.

**Material:** Of high-tensile special steel. Parts subject to extreme loading are specially hardened and tempered.

**Application:** For processing of red, blue and yellow isolated cable eyes, pin-end cable connectors, contact pins, contact pin sleeves, circular pins, circular pin sleeves, batch connectors and parallel connectors. For standardised, solderless electrical connections.

Order-No.	mm	mm <sup>2</sup>	AWG	↕	mm	€/pc.
33841 1	220	0.5 - 6	20 - 10	510	1	84.50



**NEW**

### Z 62 0 001 06 Crimp tools for wire-end sleeves.

**Standards:** Wire-end sleeves with and without isolating collar according to DIN 46228, EN 50027.

**Head shape:** Trapezoid crimp, radial travel.

**Design:** Crimp profile:  
**Profile 1.** 0.14 - 0.75 mm<sup>2</sup> / AWG 26 - 18  
**Profile 2.** 1.0 - 1.5 mm<sup>2</sup> / AWG 18 - 16  
**Profile 3.** 2.5 mm<sup>2</sup> / AWG 14  
**Profile 4.** 4.0 mm<sup>2</sup> / AWG 12  
**Profile 5.** 6.0 mm<sup>2</sup> / AWG 10  
**Profile 6.** 10.0 mm<sup>2</sup> / AWG 8  
 Delockable force lock for ensuring complete crimping process; required crimp pressure is factory set. Ergonomically formed soft handle with slip protection for especially comfortable handling.

**Material:** Of high-tensile special steel. Parts subject to extreme loading are specially hardened and tempered.

**Application:** For processing of wire-end sleeves with and without isolating collars.

Order-No.	mm	mm <sup>2</sup>	AWG	↕	mm	€/pc.
33844 2	220	0.14 - 10	26 - 8	510	1	89.50



**NEW**

### Z 62 0 003 06 Crimping tools for non-isolated contact pins.

**Standards:** Non-isolated contact pin according to DIN 46247.

**Head shape:** B-crimp, radial pressing. Conducting and isolating crimp are carried out in one work step.

**Design:** Crimp profile: Contact width 6.3 / 9.5 mm  
**Profile 1.** 0.25 - 0.5 mm<sup>2</sup> / AWG 22 - 20 / F 6.3 + 9.5  
**Profile 2.** 0.5 - 1.0 mm<sup>2</sup> / AWG 20 - 16 / F 6.3 + 9.5  
**Profile 3.** 1.5 - 2.5 mm<sup>2</sup> / AWG 16 - 14 / F 6.3 + 9.5  
**Profile 4.** 4.0 - 6.0 mm<sup>2</sup> / AWG 12 - 10 / F 6.3 + 9.5  
 Delockable force lock for ensuring complete crimping process; required crimp pressure is factory set. Ergonomically formed soft handle with slip protection for especially comfortable handling.

**Material:** Of high-tensile special steel. Parts subject to extreme loading are specially hardened and tempered.

**Application:** For processing of non-isolated contact pins and contact pin sleeves for standardised, solderless electrical connections.

Order-No.	mm	mm <sup>2</sup>	AWG	↕	mm	€/pc.
33842 8	220	0.25 - 6	22 - 10	510	1	89.50

# Wiha crimp tools and stripping pliers.

## Crimp tools.



**NEW**

### Z 62 0 004 06 Crimping tools for non-isolated cable eyes with closed sleeve.

Standards: Non-isolated cable eyes with closed crimping sleeve according to DIN 46234 / DIN 46230 / DIN 46341.

Head shape: W injection, radial pressing.

Design: Crimp profile:

**Profile 1.** 0.1 - 0.5 mm<sup>2</sup> / AWG 26 - 20

**Profile 2.** 0.5 - 2.5 mm<sup>2</sup> / AWG 20 - 14

**Profile 3.** 4.0 - 6.0 mm<sup>2</sup> / AWG 12 - 10

**Profile 4.** 10.0 - 16.0 mm<sup>2</sup> / AWG 8 - 6

Delockable force lock for ensuring complete crimping process; required crimp pressure is factory set.

Ergonomically formed soft handle with slip protection for especially comfortable handling.

Material: Of high-tensile special steel.

Parts subject to extreme loading are specially hardened and tempered.

Application: For processing of non-isolated cable eyes, pin-end cable connectors, batch connectors and mini cable eyes.

For solderless electrical connections according to standards.

Order-No.	mm	mm <sup>2</sup>	AWG	↕	↔	€/pc.
33843 5	220	0.1 - 16	26 - 6	510	1	89.50

## Stripping pliers and stripping cassette.



**NEW**

### 24672SB Automatic stripping pliers.

Design: Self-adjusting straight cutting edge in exchangeable cassette and wire cutter for copper and Al conductors.

Optimally positioned wire cutter enables effortless cutting of multi-wire conductors to 10 mm<sup>2</sup> / 8 AWG.

Simply replaceable stripping cassette with adjustable stripping length to 18 mm and adjustable cutting depth for various insulation materials.

Ergonomically sophisticated solution with soft plastic zone in main handle, secure gripping without play, optimised handle opening width, an angled head as well as a low weight for working without fatigue.

Material: Housing of tough glass-fibre reinforced plastic.

Soft plastic zone in upper handle section used for gripping.

Application: For precise stripping and cutting of single, multi and fine-wired cables for many tasks in the electronics industry.

Order-No.	mm	mm <sup>2</sup>	AWG	↕	↔	€/pc.
33847 3	190	0.02 - 10	34 - 8	135	1	73.50



**NEW**

### 24673SB Stripping cassette for automatic stripping pliers.

Design: Cassette with straight blade.

Order-No.	mm <sup>2</sup>	AWG	↕	↔	€/pc.
33846 6	0.02 - 10	34 - 8	7	1	19.50